

## GD-32X1E Stunningly-thin and lightweight full-HD 32" screen

Super 32 high tec display for design enthusiasts.  
The new innovation display from JVC



[Description](#)


[Main features](#)

[Technical specs](#)

[Accessories](#)

[Brochures and manuals](#)

[See all in one page](#)

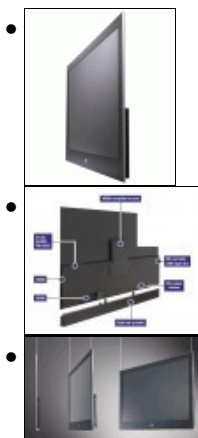

## Description

JVC GD-32X1 is a stunningly-thin and lightweight full-HD 32" panel, designed for gorgeous image reproduction. Just 6.4mm in depth at its thinnest point, and weighing a mere 5.7kg, the GD-32X1 features advanced technology, delivering a versatile performance for any application.

The monitor features an advanced picture engine, ensuring beautifully natural yet vivid still images and video reproduction, while the 100Hz/120Hz Clear Motion Drive III anti-blurring technology significantly reduces motion blur for impressive picture quality. It delivers faithful colour reproduction, thanks to 90% coverage of Adobe RGB's wide colour space along with a contrast ratio of 4,000:1. The GD-32X1 also has an LED edge-lighting system, realising a super-thin and lightweight form, while the use of fewer material resources minimises impact on the environment.

Perfect for 24/7 use, the GD-32X1 is an innovative monitor that can be flexibly and conveniently positioned anywhere. Whether mounted on a wall or even hung from the ceiling, this new monitor is ideal for use in locations such as buildings for the general public, stores and shops, businesses, and academic institutions, as well as for surveillance and medical reference applications.

## Main features

- Super Slim 32" Full HD Panel 10 Bit
- 7,8 mm boarder deep
- 14,7 mm full deep
- Vesa 100 mounting
- HDMI input
- Sub-D for analogue PC
- RS232 remote control
- Build in Photo viewer
- USB and SD card support
- Optional speakers
- Optional Color - Calibration sensor

## Additional features

### Technical specs

Screen Size:

32 inch

Aspect Ratio:

16:9

Display:

698,4 x 392,9 cm (W x H)

No of pixels:

1920 x 1080 (h x v)

Display Colours:

approx. 1.073 billion (circa 1073 Millionen)

Viewing Angle:

178° (top/bottom and left/right)

Contrast Ratio:

4.000 : 1

Brightness:

400 cd/m<sup>2</sup>

Input connectors:

HDMI x2 (CEC)

analogue RGB (using supplement conversion cable)

Composite/Component (using supplied conversion cable)  
RS-232C

Audio output:

5 W + 5 W (optional speakers at 12 ohms)

Other:

Photo viewer slot SD/SDHC card,  
USB-type compliant,  
JPEG reproduction  
100/120 Hz Clear Motion Drive III (on/off)

Weight:

5,7 kg

Dimensions:

772,4 x 496,1 x 22,5 mm ( W X H x D), excluding Vesa mount

Power requirement:

DC 28 V, AC adapter 100-240 V 50/60 Hz

ACCESSORIES (Supplied)

VESA 100 x 100 mm compliant mount  
IR Remote  
AAA batteries  
AC-adaptor for 100-240VAC  
Tabletop stand

## Accessories

- [EYEOONE-DISPLAY2](#)
- Colorimeter for Monitor Calibration
- [TS-C32BZ1B](#)
- Bezel f. GD-32X1 (black)
- [TS-C32BZ1R](#)
- Bezel f. GD-32X1 (red)
- [TS-C32BZ1S](#)
- Bezel f. GD-32X1 (silver)
- [TS-C32BZ1W](#)
- Bezel f. GD-32X1 (white)
- [TS-C32SPG](#)
- Loudspeaker f. GD-32X1

## Brochures and manuals

- 

[GD-32X1 brochure \(NPN\)-English](#)

- 

[Instruction manual \(from the JVC Professional Europe Service Information System\)](#)

## Links

## Miscellaneous